

VESTIAIRE NH/NHT/NHTD



MONOBLOC



Serrure morillon ou à clés
(fournis avec 2 clés numérotées)



Porte-étiquette


Trous de ventilation design



Ouverture des portes à 90°








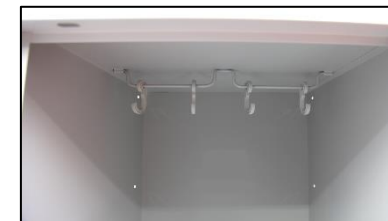



Porte cintre série NH

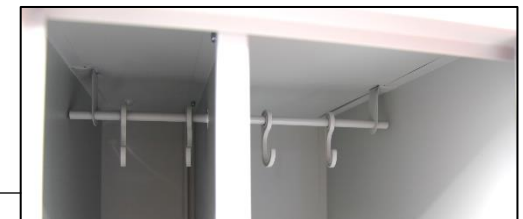







Porte cintre série NHT

Porte cintre série NHTD avec
séparation propre/salle



NH								
CODE	20 145	20 146	20 151	20 152	20 157	20 158	20 163	20 164
	180-1	180-1.2	180-2	180-2.4	180-3	180-3.6	180-4	180-4.8
H	1800							
L	300		600		900		1200	
P	500							



NHT						
CODE	20 169	20 170	20 175	20 176	20 181	20 182
	180-1	180-1.2	180-2	180-2.4	180-3	180-3.6
H	1800					
L	400		800		1200	
P	500					

COULEUR STANDARD



QUALITE DE TOLE

► CR-A1 (1203)







EPAISSEUR DE TOLE

► CORPS: 0,6 mm

► PORTE: 0,7 mm

FINITION

► Finition en poudre époxy cuit au four.

NHTD						
CODE	20 187	20 188	20 189	20 190	20 191	20 192
	180-1	180-1.2	180-2	180-2.4	180-3	180-3.6
H	1800					
L	400		800		1200	
P	500					